Gokin

TOPCon Bifacial Module with Single Glass

GK-1-72HT-F | Half-cut | 144cells

Module Efficiency up to | 1% | 0.4%

High Efficiency

Module efficiency up to 23.2% based on N-Type wafer and TOPCon technology

Anti-degradation

Unsusceptible to LID, LeTID and less annual degradation due to special charateristics of N-Type

Excellent Energy Yield

More power output in field operation due to better thermal behaviors, weak-light performance and bifaciality


Quality Guarantee

High module quality ensures long-term reliability

15 Years Product Warranty

30 Years Linear Power Warranty

Linear Performance Warranty

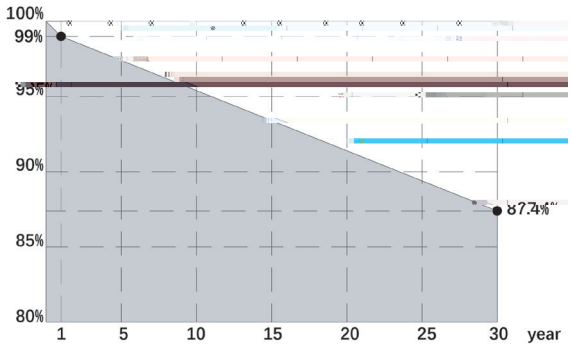

At least 99% of nominal power during first year
Thereafter max.0.4% degradation per year
At least 87.4% of nominal power up to 30 years.

IEC 61215(2021) / IEC 61730(2023)
ISO 9001: 2015: ISO Quality Management System
Anti-PID / Ammonia / Salt-mist /